


Cuplare prin bile dispuse radial, etanșare plană antipicurare
 Presiune de lucru: 250 - 300 BAR
 Temperatură de lucru: de la -25°C la +100°C

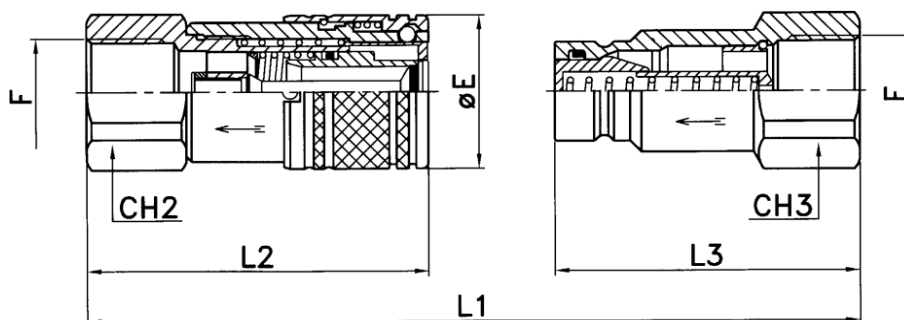

PLT1M Cuplă rapidă antipicurare FI, mamă

Cod	Filet interior	ø	CH2	CH3	øE	L1	L2	L3	Preț EUR
PLT1M 1/4-06	1/4"	6	22	22	27	96	52.5	53.5	20.94
PLT1M 3/8-13	3/8"	13	27	27	32	116	68.0	63.5	21.82
PLT1M 1/2-13	1/2"	13	27	27	32	125	73.0	67.5	21.82
PLT1M 3/4-20	3/4"	20	36	36	38	138.5	78.5	76.0	33.43
PLT1M 1-25	1"	25	46	46	48	150	87.5	84.5	78.93

PLT1T Cuplă rapidă antipicurare FI, tată

Cod	Filet interior	ø	CH2	CH3	øE	L1	L2	L3	Preț EUR
PLT1T 1/4-06	1/4"	6	22	22	27	96	52.5	53.5	8.84
PLT1T 3/8-13	3/8"	13	27	27	32	116	68.0	63.5	8.99
PLT1T 1/2-13	1/2"	13	27	27	32	125	73.0	67.5	8.99
PLT1T 3/4-20	3/4"	20	36	36	38	138.5	78.5	76.0	19.09
PLT1T 1-25	1"	25	46	46	48	150	87.5	84.5	32.88

Prețurile NU conțin TVA